## **ESCORTS**





## **SPECIFICATIONS**

## RATED CAPACITY

14 Tonne at 1.6 m radius 2.5 Tonne at 7.95 m radius

**ENGINE** 

Make & Model Escorts AE 4.312C-3A four cylinder, water

cooled diesel engine, developing 49.5 HP

@ 2200 RPM or equivalent

\*500 hrs service interval available in escorts engine.

**TRANSMISSION** 

Drive 2 Wheel drive

Type Heavy duty transmission developed

> especially for crane application. Constant mesh gearbox coupled with straight drive axle. Eight forward and two reverse speeds with high/low

selector lever

Creep Speed 1.9 km/hr, ideal for crane operation

Max. Speed 29 km/hr. (unladen)

Clutch Heavy duty clutch, wire woven,

asbestos free

**STEERING** 

Type Articulated power steering, hydraulically

controlled through 2 double acting jacks

Articulation Up to 50° **Turning Radius** 6.75 m

**BRAKES** 

Front Wheel Pneumatic assisted hydraulic brakes

Rear Wheel Disc brakes actuated through a slave

cylinder

Parking Hand control valve operated, Air assisted

Hydraulic parking brakes at rear wheels

(Standard models)

Hand control valve operated, Air assisted Parking brakes at Front wheels (with Air

brake models)

**TYRES** 

11.00 X 20 -16 PR (4 nos.), inflation Front

pressure 110 —115 PSI

Rear 13.00 X 24 -12 PR (2 nos.), inflation

pressure 35 PSI. Water ballasted

**TRACK** 

1980 mm (centre of twin wheels) Front

Rear 1680 mm (centre of wheels)

**BOOM** 

Telescoping 3 parts hydraulically powered & fully

synchronized

Type Non Slotted boom with rope compensation

Derricking Through double acting jacks **HOIST MECHANISM** 

Hoist Hydraulic winch. Four falls (Winch

capacity 10 T). Rope dia 13 mm

**HYDRAULIC SYSTEM** 

Pump Vane type hydraulic pump

Control Valve 4 spool control valve with built in

pressure relief valve and precision

control

Hydraulic Filter Suction line has a 100 mesh in-line

strainer while return line has 25

microns full flow filter

**ELECTRICAL SYSTEM** 

Type 12V Single battery, Negative earth

**CAPACITIES** 

Fuel Tank 38 Itrs. Hydraulic Tank 65 ltrs.

**OVERALL DIMENSIONS** 

Length 11000 mm Width 2550 mm Height 3100 mm

**OPERATING WEIGHT (KG)** 

Gross Vehicle

Weight 11200 kg

**SAFETY SYSTEM** 

Rope compensation for auto leveling

Overload audio warning system

Hose protection failure device

Safety brakes on hoist

Cylinder guard for protection

System Low air pressure warning buzzer

STANDARD ACCESSORIES

All Weather Cabin

Lift Cylinder Guard

Turn & Reverse Lamp

Front Bumper

Rear View Mirror

Reflectors

**OPTIONAL ACCESSORIES** 

Fly Jib Tool Box

Steering Wheel


· Fire Extinguisher

Spark Arrestor Heavy Duty Bumper · Safe Load Indicator

14 x 24 Heavy Duty Tyres

Air Brakes on Front Wheel

Over Hoist & Hydraulic Cutoff Kit

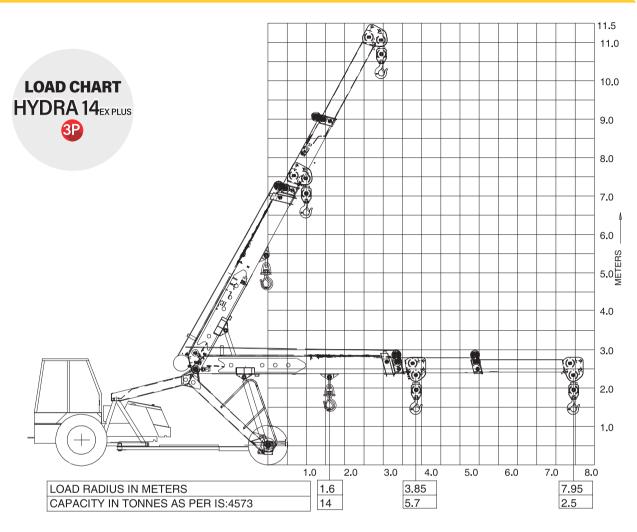

Rated loads are calculated for operation on leveled surface.

## FEATURES



BOOM

Compensation for precision handling & auto levelling of loads.



**REAR BRAKES** 

Disc brakes at the rear for effective braking



**TRANSMISSION** 

Heavy duty straight axle with constant mesh transmission.



RELIABILITY

Rugged structure for heavy duty application.



**CABIN** 

Ergonomically designed spacious cabin with modern dashboard for utmost operator comfort and operation.




**ENGINE** 

Escorts engine BS-III (CEV compliant) high on power/ torque & low on fuel consumption & maintenance.





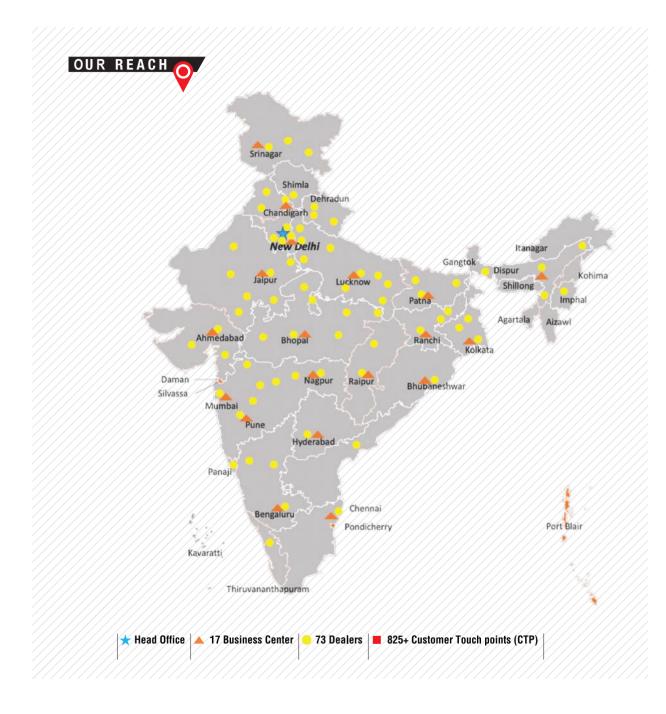



Escorts Kubota Limited (Formerly Escorts Limited) Construction Equipment Plot No. 219, Sector- 58, Ballabhgarh- 121 004, Faridabad, Haryana (INDIA) Tel.: 0129-2306574/2306598/2306571

Fax: 0129-2306572 Website: www.escortsgroup.com



Authorised Dealer

1800-180-4488

**Toll Free No.:**