ESCORTS



Structure **Robust**



SPECIFICATIONS

RATED CAPACITY

15 Tonne at1.6 m radius0.8 Tonne at13.7 m radius

ENGINE

Make & Model Escorts AE 4.312C-3A four cylinder, Water

cooled diesel engine developing 49.5 HP @ 2200 RPM or equivalent

*500 hrs service interval available in escorts engine.

TRANSMISSION

Drive 2 Wheel drive

Type Heavy duty transmission developed

especially for crane application. Constant mesh gearbox coupled with straight drive axle. Eight forward and two reverse speeds

with high/low selector lever

Creep Speed 1.9 km/hr. ideal for crane operation

Max. Speed 29 km/hr. (unladen)

Clutch Heavy duty clutch, wire woven,

asbestos free

STEERING

Type Articulated power steering, hydraulically

controlled through 2 double acting jacks

Articulation Up to 56° Turning Radius 6.75 m

BRAKES

Front Wheel Pneumatic assisted hydraulic brakes

Rear Wheel Disc brakes actuated through a slave

cylinder

Parking Hand control valve operated, Air assisted

Hydraulic parking brakes at rear wheels

(Standard models)

Hand control valve operated, Air assisted

Parking brakes at Front wheels (with Air

brake models)

TYRES

Front 11.00 X 20 -16 PR (4 nos.), inflation

pressure 110 - 115 PSI

Rear 13.00 X 24 -12 PR (2 nos.), inflation

pressure 35 PSI. Water ballasted

TRACK

Front 1980 mm Rear 1680 mm

№ воом

Telescoping 4 parts, 3 parts hydraulically powered &

fully synchronized, 4th part power extended & manually pinned

Type Slotted boom with rope compensation

Derricking Through double acting jacks

HOIST MECHANISM

Hoist Hydraulic winch. Six falls (Winch

capacity 12 T). Rope dia 13 mm

HYDRAULIC SYSTEM

Pump Vane type hydraulic pump

Control Valve 4 spool control valve with built in

pressure relief valve and precision

control

Hydraulic Filter Suction line has a 100 mesh inline

strainer while return line has 25

microns full flow filter

ELECTRICAL SYSTEM

Type 12V Single battery, Negative earth

CAPACITIES

Fuel Tank 38 ltrs. Hydraulic Tank 65 ltrs.

OVERALL DIMENSIONS

Length 12500 mm Width 2550 mm Height 3100 mm

OPERATING WEIGHT (KG)

Gross Vehicle

Weight 11550 kg

SAFETY SYSTEM

· Rope compensation for auto leveling

Overload audio warning system

· Hose protection failure device

· Safety brakes on hoist

Cylinder guard for protection

· System Low air pressure warning buzzer

STANDARD ACCESSORIES

All Weather Cabin

· Lift Cylinder Guard

Turn & Reverse Lamp

Front Bumper

· Rear View Mirror

Reflectors

OPTIONAL ACCESSORIES

Fly Jib • Tool Box

Spark Arrestor
 Tyre Guard

Steering Wheel
 Fire Extinguisher


· Safe Load Indicator

Heavy Duty Bumper

14 x 24 Heavy Duty Tyres

· Air Brakes on Front Wheel

· Over Hoist & Hydraulic Cutoff Kit

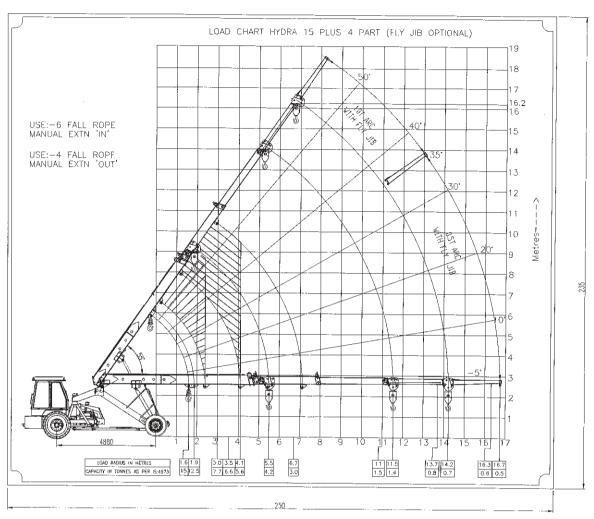

Rated loads are calculated for operation on leveled surface.

FEATURES



SLOTTED BOOM AND ROPE

Compensation for precision handling & auto leveling of loads.



HYDRAULIC WINCH OF 12T

Capacity with 6 falls snatch block for precision handling & low maintenance.



TRANSMISSION

Heavy duty straight axle with constant mesh transmission.



ENGINE

Escorts Engine BS-III (CEV compliant)
- high on power/torque & low on fuel consumption & maintenance.



CABIN


Ergonomically designed spacious cabin with modern dashboard for utmost operator comfort and operation.



REAR BRAKES

Disc brakes at the rear for effective braking.



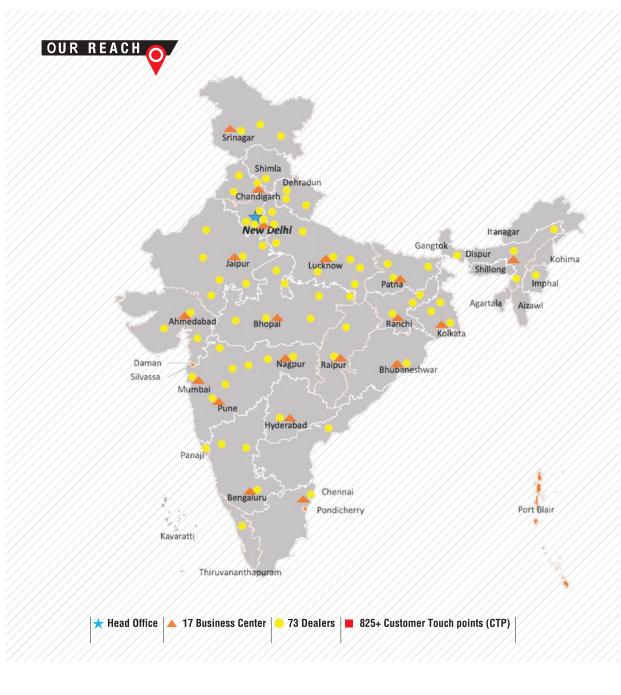





Fax: 0129-2306572 Website: www.escortsgroup.com

e-mail: ece.helpline@escorts.co.in